


PJHD & PJHDW

Technical Data:

Aluminium

- Extrusion – PS uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts are (6063-T5, T6, T52) as per ASTM B221.
- Profiles can be customised as per following alloys: (6061-T5, T6, T51)(6105-T5, T6) (6005-T5) (6005A-T5, T61) as per ASTM B221
- Sheet – 19000 M, 19000 H2, 31000 H2, 31000 H3, 1100/1200 Stainless Steel Type 304 as per ASTM A167
- Turnbar
Material –Stainless Steel Turnbar
- Standard Loading
2000 lbs

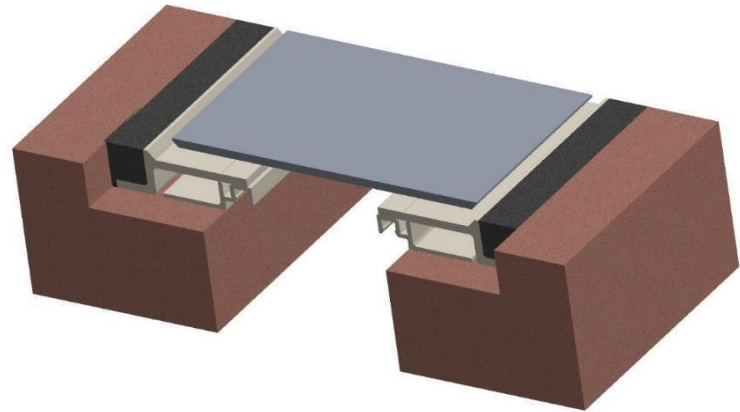

Capable of Lateral Movement

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE	BLOCKOUT WIDTH	BLOCKOUT HEIGHT
PJ-200HD	51mm	19mm	111mm	219mm	118mm	35mm
PJ-400HD	102mm	70mm	162mm	222mm	92mm	35mm
PJ-600HD	152mm	70mm	235mm	298mm	105mm	35mm
PJ-800HD	203mm	70mm	343mm	375mm	118mm	35mm
PJW-200HD	51mm	0mm	110mm	134mm	118mm	35mm
PJW-400HD	102mm	25mm	161mm	162mm	92mm	35mm
PJW-600HD	152mm	25mm	224mm	226mm	105mm	35mm
PJW-800HD	203mm	137mm	280mm	289mm	118mm	35mm

