

## PSF 700-1800 Series

### TECHNICAL DATA:

#### Aluminum


- Extrusion – PS uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts are (6063-T5, T6, T52) as per ASTM B221
- Profiles can be customised as per following alloys: (6061-T5, T6, T51), (6105-T5, T6) (6005-T5) (6005A-T5, T61), as per ASTM B221

#### Primary Gasket/Seal

- Single Durometer: 70 Shore A,
- Available in standard Black Colour

#### Secondary Seal

- Material – PVC, ASTM D2000
- Durometer – 65 Shore A

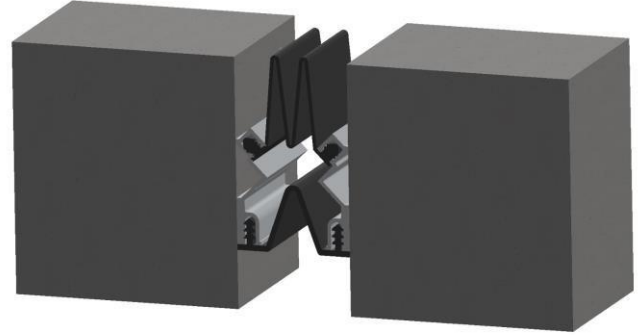

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE	BLOCKOUT WIDTH	BLOCKOUT HEIGHT
PSF-800	203mm	64mm	305mm	203mm	N/A	N/A
PSF-1000	254mm	64mm	381mm	254mm	N/A	N/A
PSF-1200	305mm	152mm	457mm	305mm	N/A	N/A
PSF-1400	356mm	152mm	533mm	356mm	N/A	N/A
PSF-1600	406mm	152mm	610mm	406mm	N/A	N/A
PSF-1800	457mm	152mm	686mm	457mm	N/A	N/A

