

## PSFM & PSFMW 100-1200 Series


### TECHNICAL DATA:

#### Aluminum

- Extrusion – PS uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts. Will be one of the following: (6063 -T5,T6, T52) (6061-T5, T6, T51) (6105-T5, T6) (6005-T5) (6005A-T5, T61), ASTM B221

#### Seal

- Material – EPDM
- Durometer – 65 Shore A

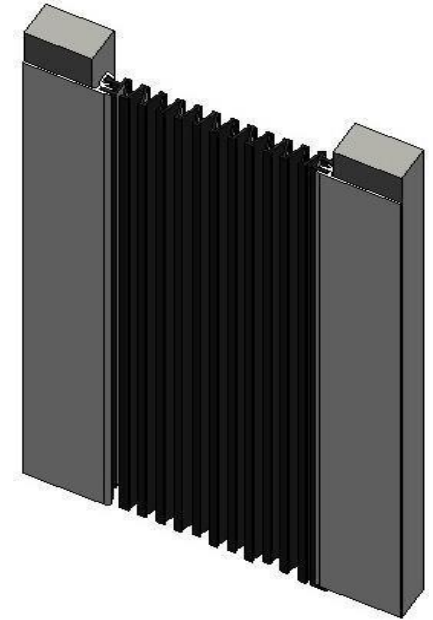

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE	BLOCKOUT WIDTH	BLOCKOUT HEIGHT
PSFM-100	25mm	32mm	76mm	105mm	N/A	N/A
PSFM-200	50mm	32mm	76mm	130mm	N/A	N/A
PSFM-400	100mm	32mm	152mm	180mm	N/A	N/A
PSFM-600	150mm	44mm	229mm	230mm	N/A	N/A
PSFM-800	200mm	64mm	305mm	280mm	N/A	N/A
PSFM-1000	250mm	64mm	381mm	330mm	N/A	N/A
PSFM-1200	300mm	64mm	460mm	380mm	N/A	N/A

**EXPANSION JOINTS COVER SYSTEMS**

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE	BLOCKOUT WIDTH	BLOCKOUT HEIGHT
PSFMW-100	25mm	13mm	38mm	58mm	N/A	N/A
PSFMW-200	50mm	25mm	76mm	89mm	N/A	N/A
PSFMW-400	100mm	50mm	152mm	139mm	N/A	N/A
PSFMW-600	150mm	75mm	225mm	189mm	N/A	N/A
PSFMW-800	200mm	100mm	305mm	239mm	N/A	N/A
PSFMW-1000	250mm	125mm	375mm	289mm	N/A	N/A
PSFMW-1200	300mm	150mm	450mm	339mm	N/A	N/A

