



BUILT FOR PERFORMANCE.
DESIGNED TO IMPRESS.

Pinnacle JD TRADE+ is durable enough to stops the dirt at the door with it's perfection in manufacturing and elemental combination.

Ideal for traffic-areas, these entryway grids enhance traction and scrape shoes to trap substantial amounts of sand, dirt and mud. With many aesthetic choices, JD TRADE+ looks as good as it performs. The eco-friendly and functional matting systems are perfect for new construction or remodeling applications.



ENHANCED
TRACTION

Improves grip and
reduces slip



EFFECTIVE DIRT
REMOVAL

Traps dirt, sand
and moisture



ECO-FRIENDLY

Sustainable &
functional matting
system



CUSTOMIZABLE

Multiple insert and
finish options



DURABLE

Engineered for high
traffic and long life

PRODUCT DETAILS



GRID DEPTH

Available in 11/16"
(17.5mm)



TREAD SPACING

1-1/2" (38.1mm) O.C.



LOAD CAPACITY

Excellent shoe-cleaning
and traction capability



PRODUCT WEIGHT

16.2 kg/ sqm



WHEEL ROLLING
LOAD CAPACITY

Peditred® - 454 kgs /
wheel rolling load
capacity




AESTHETICS


Aesthetically suitable
architectural solution

SECTIONAL DETAILS

25mm level base frame for recess mounting

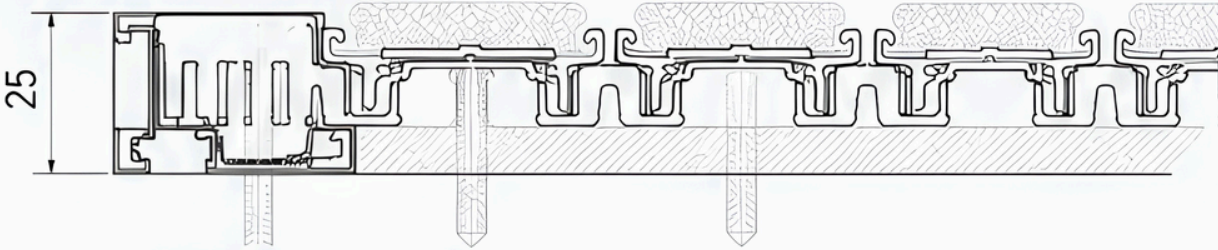

17mm without frame for recess mounting

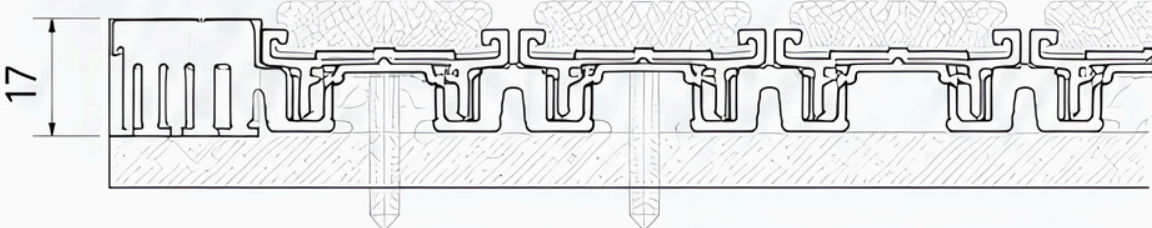

WARRANTY
TWO-YEARS LIMITED WARRANTY
FROM DATE OF SUPPLY



FEATURES

- Mounting options available - recessed or surface mounted
- Available in 3/4" (19.1mm) profile
- Aluminum tread rails
- Completely customizable
- Slip resistant
- For new construction or existing recesses



APPLICATION

- Vestibules & Interior / Exterior entries



BUILDING SEGMENT

- Aviation & Transportation
- Education & Healthcare
- Office & Mixed use
- Retail & Hospitality
- Senior Living
- Sports & Entertainment



MOUNTING OPTIONS

- Recessed mounted
- Level Base frame
- No Frame



RAIL/FRAME FINISH OPTIONS

- Mill
- Anodized: Clear, Black & Bronze



INSERT OPTIONS

- Heavy-duty carpet
- Exterior carpet
- Recycled rubber
- Abrasive
- Rubber



CERTIFICATIONS

- Static Coefficient of Friction test
- Radiant Flux of Floor covering test
- Flammability
- Smoke density
- Cradle to Cradle
- LEED compliant
- PVC free
- Indoor air quality pollutant control