

EXPANSION JOINTS COVER SYSTEMS

PFT & PFTW


Technical Data:

Aluminum

- Extrusion – PS uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts. Will be one of the following: (6063-T5, T6, T52)

Profiles can be customised with following grades:(6061-T5, T6, T51), (6105-T5, T6) (6005-T5) (6005AT5, T61), ASTM B221

- Primary Seal
 - Dual Durometer 65 Shore A, 90 Shore A, ASTM D2240
 - Available in Black Standard color
- Frame Heights
 - 1" model
 - 2" model
- Standard Loading 500 lbs.

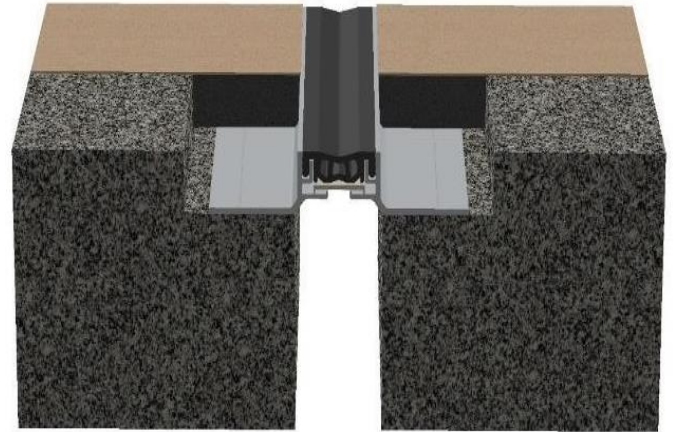

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE	BLOCKOUT WIDTH	BLOCKOUT HEIGHT
PFT-100	25mm	19mm	32mm	32mm	64mm	25 mm
PFT-200	51mm	38mm	64mm	48mm	64mm	25 mm
PFTW-100	25mm	19mm	32mm	32mm	64mm	25mm
PFTW-200	51mm	38mm	64mm	48mm	64mm	25mm

